

HARMSCO®

BF SB

Hurricane® Betterfilter™ SB Housings

High Efficient Housings

Cyclonic Filtration

Harmsco® Betterfilter™ Swing Bolt Housings provide exceptionally clear water and provide energy savings manufactured in 304L stainless steel



Certified to
NSF/ANSI/CAN
Standard 50

Features

- ▶ Patented Up-flow Design
- ▶ Pressure rated to 50 psi
- ▶ NSF/ANSI/CAN Standard 50 listed
- ▶ Electro-polished & Matte finish
- ▶ “Swing Bolt” closure system
- ▶ Combination cyclone separator with upflow and cartridge filter in a single compact design
- ▶ Four sizes for greater utility
- ▶ 304L stainless steel housing and internal
- ▶ The industry’s largest selection of NSF certified cartridge options
- ▶ Flow rates up to 504 GPM

Applications


- ▶ Swimming Pool Filtration
- ▶ Waterpark Filtration
- ▶ City Aquariums
- ▶ Large Water Fountains
- ▶ Spas & Hot Tubs
- ▶ Commercial Pools



HARMSCO® Filtration Products



Harmsco® Hurricane® Swimming Pool SB Housing BF SB

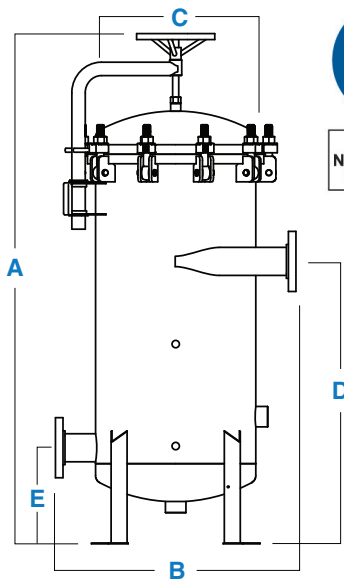

Certified to NSF/ANSI/CAN Standard 50



BFHUR170SB



BFHUR510SB



BFHUR850SB



BFHUR1360SB

Ordering Information


Filter Model	Pressure Rating (psi)	Rec. Flow Rate (GPM)	A Filter Height	B Width	C Diameter	D Inlet	E Outlet	Pipe Size I/O NPS	Drain Size NPT	Floor Space	Service Height
BFHUR170SB	50	63	48"	15-1/2"	11"	23-5/8"	9-3/4"	2" Flange	3/4"	1.8 ft ²	77"
BFHUR510SB	50	189	64"	30"	20"	35-1/4"	12"	3" Flange	1-1/2"	3.7 ft ²	98-1/2"
BFHUR850SB	50	315	74"	37-1/2"	30"	38"	14-1/8"	4" Flange	1-1/2"	7.6 ft ²	98-1/2"
BFHUR1360SB	50	504	84"	44-1/4"	35-3/8"	44-1/4"	20-1/2"	6" Flange	1-1/2"	13 ft ²	104-1/2"

Filter Specifications

- ▶ Built to ASME design standards
- ▶ Standpipes - Stainless Steel
- ▶ Inlet/Outlet - flanged connections
- ▶ O-ring housing seal, swing-bolt closure
- ▶ Pressure - Up to 50 psi max.
- ▶ Temperature - Up to 140°F (60°C) Temperature

Cartridge Models	Brochure Pages
Hurricane Pool Cartridges	HSP
SureSafe Pool Cartridges	AMPC

For detailed information on each cartridge, please refer to the individual brochures provided, and explore our extensive selection of cartridges.

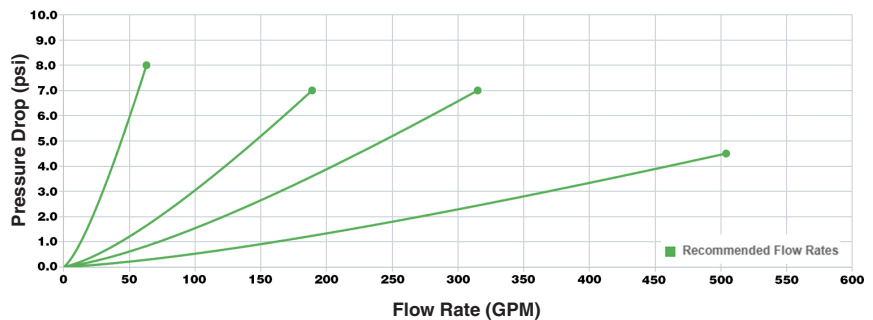

Note: This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. **Limited Warranty:** Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.



HARMSCO® Filtration Products
 7169 49th Terrace North, Riviera Beach, FL 33407
 (561) 848-9628 • E-mail: sales@harmsco.com

www.harmsco.com



11/25 Rev. 1