Betterfilter™

Single Cartridge Style

Introduced 1984

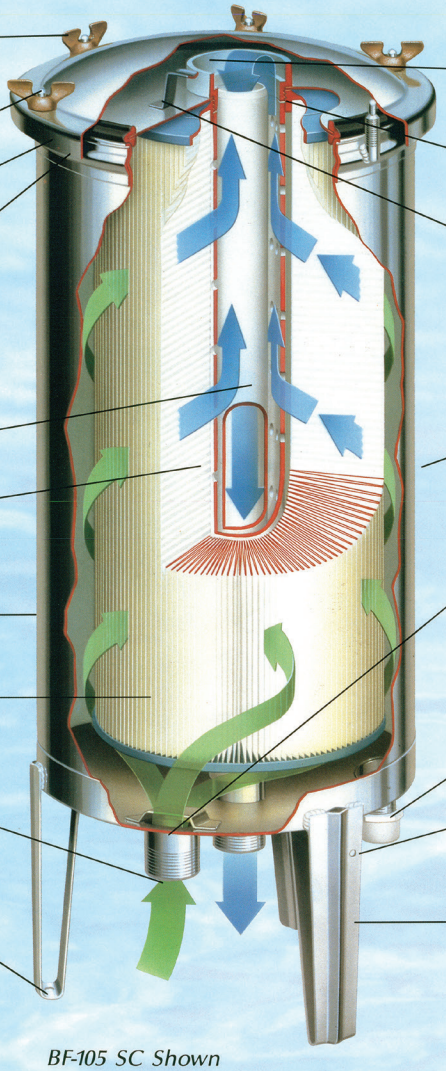

Die cast bronze wing nuts, easy to grasp for positive seal

6–½″ dia. T-303 studs

13 gauge T-304 lid

Fail safe lid design– directs water downward in the event of gasket failure

Rugged PVC center tube

Corrugated Super-Tuf media shown

18 gauge T-304

Cartridge available in two medias

Rugged 2″ N.P.T. T-304 pipe nipples

½″ x ¾″ bolt-down slots provided

Patented cartridge sealing method

Patented upflow design– Eliminates air entrapment

Patented cartridge sealing method

Convenient handles on the clean side of the filter allow servicing without touching the dirty cartridge

N.S.F. listed for commercial and public applications

Patented upflow design eliminates the possibility of bypassing dirt during cleaning

1″ N.P.T drain nipple

Grounding holes provided

16 or 14 gauge T-304 legs

Prorated 10-year warranty

BF-105 SC Shown

Model No.	Maximum NSF Flow Rate* Private Pools/ Public Pools	Turnover NSF Flow Rate Private Pools/ Public Pools	Number Of Cartridges	Filter Area	Height	Service Height Clearance	Floor Space	Pipe In and Out	Approximate Shipping Weight
BF55 SC**	55 GPM 20.6 GPM	19,800 Gals. 7,416 Gals.	1	55 FT²	19.5″	30″	13″ x 13″	2″ N.P.T.	27 lbs.
BF105 SC**	105 GPM 39.37 GPM	37,800 Gals. 14,173 Gals.	1	105 FT²	28″	48″	13″ x 13″	2″ N.P.T.	39 lbs.
BF155 SC**	155 GPM 58 GPM	55,800 Gals. 20,880 Gals.	1	155 FT²	37″	68″	13″ x 13″	2″ N.P.T.	50 lbs.

***NSF Private Pool Flow Rate is: 1 GPM per FT² of Filter Area**
***NSF Public Pool Flow Rate is: .375 GPM per FT² of Filter Area**

**** Add suffix (TC) to specify Tropi-Clean cartridges**

Harmsco®
UPFLOW CARTRIDGE FILTRATION
A FLORIDA CORPORATION

Harmsco Inc.
P.O. Box 14066
North Palm Beach, FL 33408
(407) 848-9628
Toll Free (800) 327-3248
Fax: (407) 845-2474