

HARMSCO®

ST

Harmsco® Supertuf™ Pool Cartridges

20 Micron Cartridge

Designed for BetterFilter™ Pool Housings


- Longer filter runs for fewer change-outs
- Lower pressure drops
- Reduced maintenance down time and cost
- Increased debris reduction
- Easy to install, remove, clean and replace
- Superior water clarity, polish, and sparkle



Certified to
NSF/ANSI/CAN
Standard 50

Features

- ▶ SuperTuf™ surpasses the industry standard in cartridge filtration area
- ▶ NSF/ANSI/CAN 50 compliant
- ▶ 20 micron polyester plus media refines water to 5 micron
- ▶ Cleanable and reusable in most pool applications
- ▶ Pleated construction maintains pleat separation for maximum flow
- ▶ Residential & large pool applications

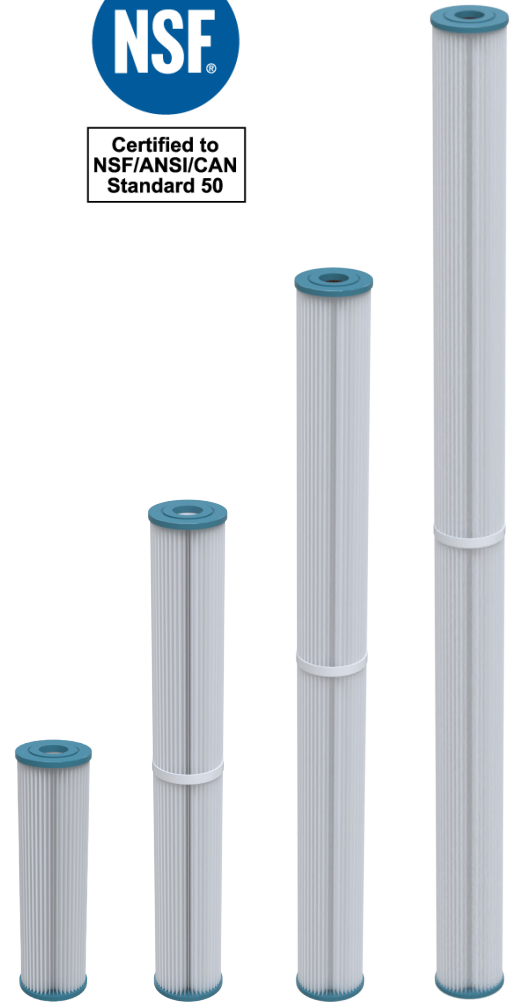

ST/6

ST/12

ST/18

ST/24

Applications

- ▶ Swimming Pool Filtration
- ▶ Residential & Commercial Pools
- ▶ Splash Areas / Waterpark
- ▶ Spas & Hot Tubs
- ▶ Fountain Filtration



HARMSCO® Filtration Products



Made in USA

Specifications

- ▶ **Micron Rating:** 20 Micron Nominal
- ▶ **Filter Media:** Polyester-Plus
- ▶ **Center Tube:** PVC
- ▶ **End Caps:** Plastisol
- ▶ **Temperature:** 140°F (60°C) temperature limit*
Temperature limits vary and depend on pressure and time under load.




Certified to
NSF/ANSI/CAN
Standard 50

Cartridge Selection/Sizing Guide


Available in 20 Micron Rating

Product Code	Nominal Micron Rating	Media (sq. ft.)	Recommended Flow Rate* (GPM)	Length (in)	O.D. (in)
Harmsco® Supertuf™ Cartridges (2-3/4" OD)					
ST/6	20	6	2.2	9-3/4"	2-3/4"
ST/12	20	12	4.5	19-1/2"	2-3/4"
ST/18	20	18	6.7	29-1/4"	2-3/4"
ST/24	20	24	9	39"	2-3/4"

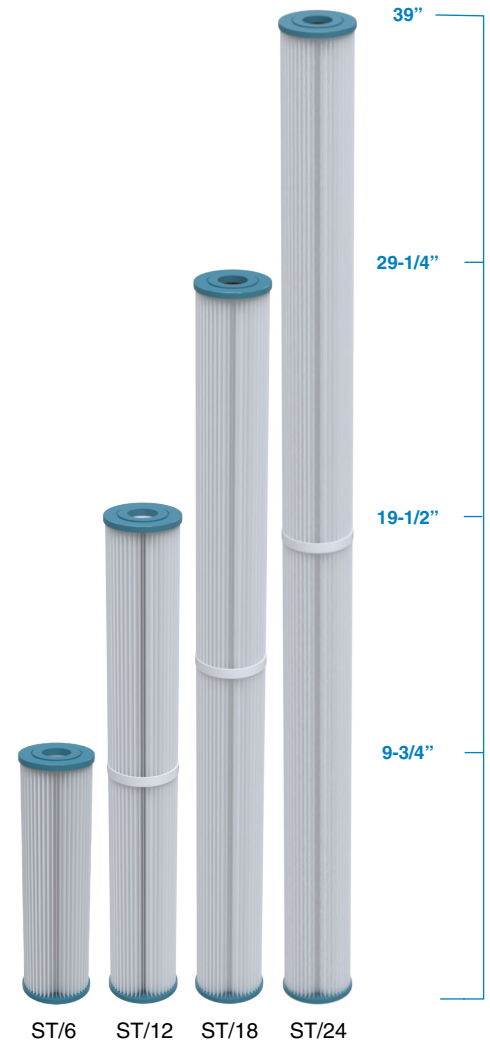

Pressure Drop

Pressure drop shown is for BF 168 filter housing and ST/12 (QTY 14) 20 micron filter cartridge in clean water

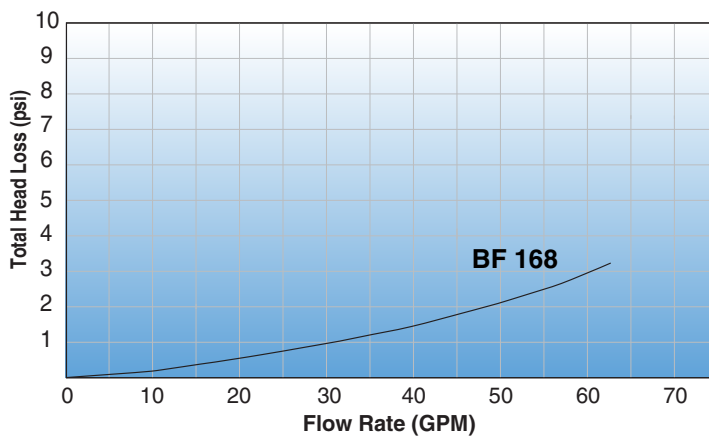

Note: This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. **Limited Warranty:** Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.



HARMSCO® Filtration Products

7169 49th Terrace North, Riviera Beach, FL 33407
(561) 848-9628 • Toll-free: (800) 327-3248 • E-mail: sales@harmsco.com

www.harmsco.com



Made in USA
11/25 Rev. 1