


HARMSCO®


HarmscoSecure® WATER FILTRATION SYSTEM

Four-Stage Advanced Purification In One Proven, Fail-Safe System


Combines pre-filtration media, activated carbon filtration,
1 micron absolute, and ultraviolet sterilization,
in a design that continuously purifies your water



PRE-FILTER
(5 micron)



**ACTIVATED
CARBON**



1 MICRON
Absolute Filtration



**ULTRAVIOLET
STERILIZATION**

Why Choose the HarmscoSecure®?

- Combines four filtration technologies
- Patented Up-Flow design for 100% efficiency
- UV sterilization after filtration
- Low maintenance & compact design
- Recommended flow rate 15 GPM
- Housing constructed from **304L Stainless Steel** (316L option available)

Ideal Applications

- Whole House/Residential
- Food & Beverage
- Marine
- Coffee Shops
- Restaurants
- Schools
- Public Facilities
- Water Bottling Filtration
- Hotels



HARMSCO®
FILTRATION PRODUCTS




MADE IN USA

Multi-Stage Technology

Advanced up-flow filtration combined with a four-stage design ensures water is thoroughly purified and sterilized for superior quality

Flow Rate/Pressure Drop

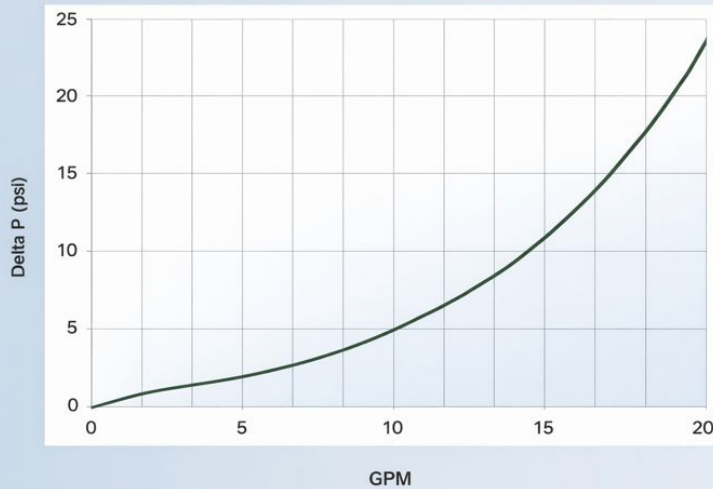


Pre-Filter
5 micron

Activated Carbon
100% Coconut
Activated Carbon
Core

Inner Media
1 micron absolute

PVC Center Core

Lower Chamber
Two sidewall mounted
utilizing quartz sleeves for
high UV efficiency

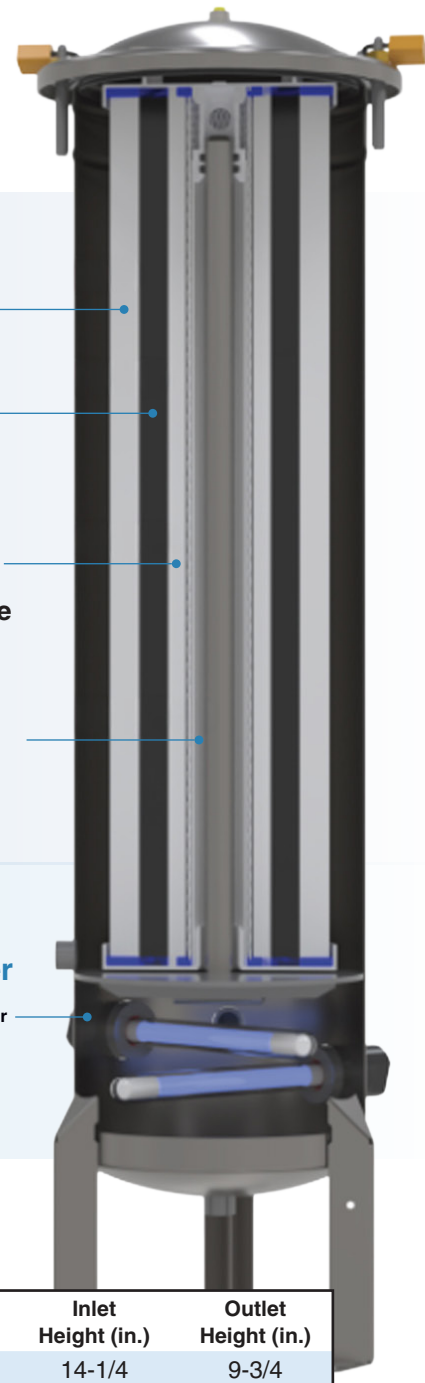

Tests

- Performs to NSF/ANSI Standard 42 for chlorine reduction
- Independently EPA tested
- Continuous 24/7 disinfection & filtration

Housing Specifications

Product Code	Rec. Flow Rate (GPM)	Filter Height (in.)	Service Height (in.)	Housing Diam. (in.)	Inlet/Outlet FPT (in.)	Drains (2) FPT (in.)	Inlet Height (in.)	Outlet Height (in.)
HS-30	15	46	76	10	1	1/2	14-1/4	9-3/4

Housing is constructed of low carbon stainless steel; max. pressure rating 150 psi; max. temperature 120°F.

Cartridge Specifications

Cartridge is sold separately

Product Code	Outer Filter Sediment Removal (ft. ²)	Activated Carbon Adsorber Extrusion (in. ³)	Final Filter Cyst Rated (ft. ²)
HSC-30	50	404	18.5

Note: This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. Limited Warranty: Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.



HARMSCO®
FILTRATION PRODUCTS

7169 49th Terrace North, Riviera Beach, FL 33407
(561) 848-9628 • Toll-free: (800) 327-3248
Email: sales@harmsco.com



MADE IN USA
9/26 Rev. 1

www.Harmsco.com